

ADMIN CONSOLE > USER MANAGEMENT >

# Ping Identity SCIM Integration

View in the help center:

<https://bitwarden.com/help/ping-identity-scim-integration/>

## Ping Identity SCIM Integration

System for cross-domain identity management (SCIM) can be used to automatically provision and de-provision members and groups in your Bitwarden organization.

### Note

SCIM Integrations are available for **Teams and Enterprise organizations**. Customers not using a SCIM-compatible identity provider may consider using [Directory Connector](#) as an alternative means of provisioning.


This article will help you configure a SCIM integration with Ping Identity. Configuration involves working simultaneously with the Bitwarden web vault and Ping Identity Administrator dashboard. As you proceed, we recommend having both readily available and completing steps in the order they are documented.

## Enable SCIM

### Note

**Are you self-hosting Bitwarden?** If so, complete [these steps to enable SCIM for your server](#) before proceeding.

To start your SCIM integration, open the Admin Console and navigate to **Settings → SCIM provisioning**:

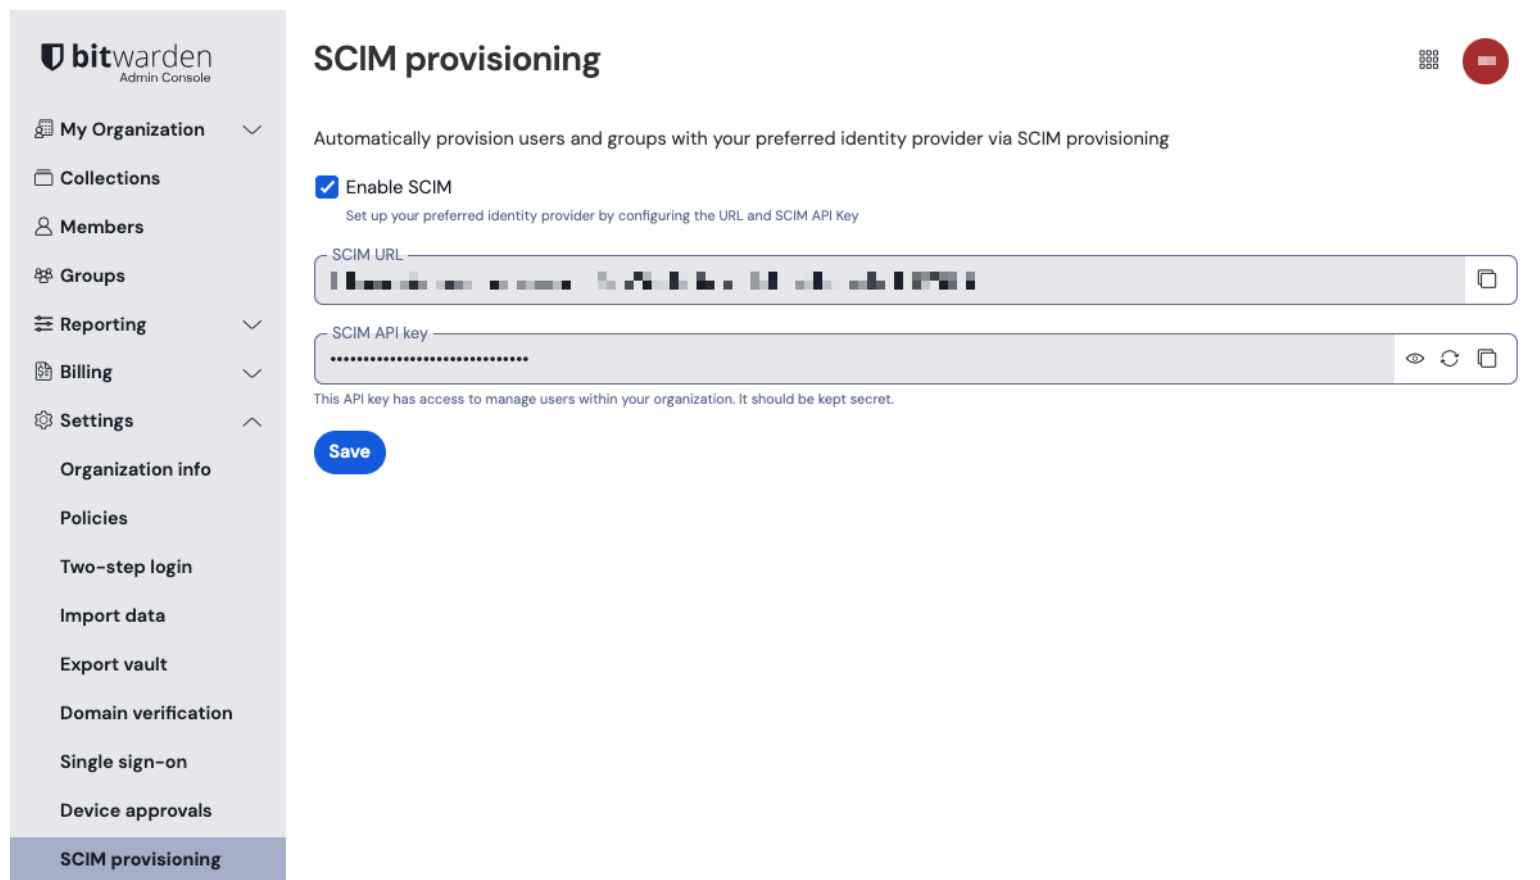

The screenshot shows the Bitwarden Admin Console interface. On the left is a sidebar with navigation links: My Organization, Collections, Members, Groups, Reporting, Billing, and Settings. The Settings section is expanded, showing options like Organization info, Policies, Two-step login, Import data, Export vault, Domain verification, Single sign-on, Device approvals, and SCIM provisioning (which is highlighted). The main content area is titled 'SCIM provisioning' and contains the following elements:


- A description: 'Automatically provision users and groups with your preferred identity provider via SCIM provisioning'.
- A checkbox labeled 'Enable SCIM' which is checked. Below it is a subtext: 'Set up your preferred identity provider by configuring the URL and SCIM API Key'.
- A text input field for 'SCIM URL' containing a long alphanumeric string.
- A text input field for 'SCIM API key' containing a series of dots. To the right of this field are icons for visibility (eye), refresh, and copy.
- A warning message: 'This API key has access to manage users within your organization. It should be kept secret.'
- A blue 'Save' button.

### SCIM provisioning

Select the **Enable SCIM** checkbox and take note of your **SCIM URL** and **SCIM API Key**. You will need to use both values in a later step.

## Create a SCIM app

1. Navigate to provisioning  **New Connection**.

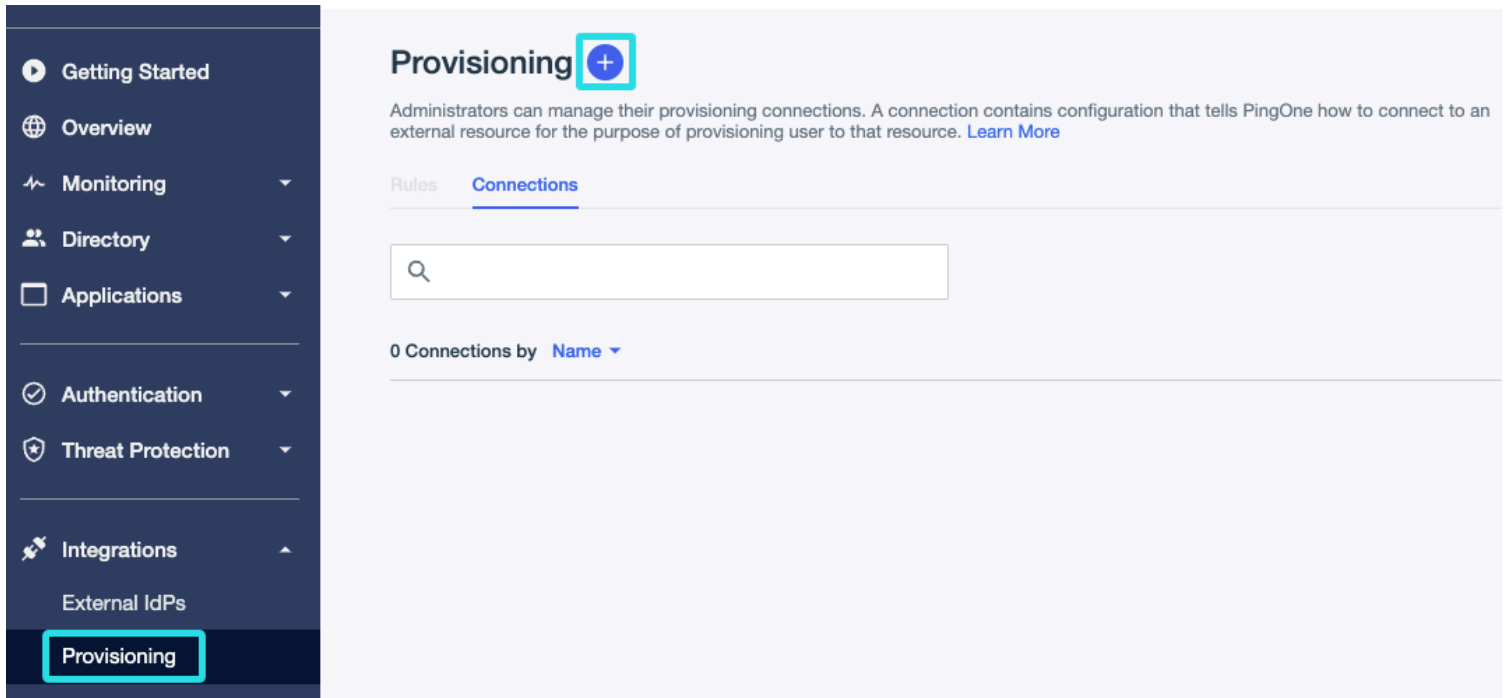

Ping Identity new Connection

2. In the Create a New Connection window, choose the **Select** option for **Identity Store**.
3. In the Identity Store, enter SCIM into the search box and select **SCIM Outbound**. Once this step is complete, select **Next**.

## Create a New Connection



To create a new connection first select a provisioning identity store from the options below.



**SCIM Outbound**

Integrate with a SCIM compliant directory to provision users out of the PingOne Directory.

### SCIM Connection

4. Input a Name and Description for the SCIM connection.
5. Next, you will be required to input the **SCIM BASE URL**. Copy the **SCIM URL** value located on the Enable SCIM page in the Bitwarden Admin Console and paste it into this field.
6. Using the **Authentication Method** dropdown menu, select **OAuth 2 Bearer Token**. A field will appear named **OAuth Access Token**, paste the **SCIM API key** value from the Bitwarden Admin Console into this field.

## Create a New Connection



Specify the authentication configuration for the connection.

## Configure Authentication

SCIM BASE URL \*

SCIM version

Authentication Method

OAuth Access Token \*

Auth Type Header

Users Resource

Groups Resource

[Previous](#)[Cancel](#)[Test Connection](#)[Next](#)

Ping Identity SCIM connection test

7. Once setup is complete, you may select **Test Connection**. If successful, select **Next**.

8. On the **Configure Preferences** page, select desired preferences and actions.

#### Note



Setting the Remove Action setting to **Disable** will result in Bitwarden users being moved to **Revoked** status rather if the user fails to meet the filter criteria set on Ping Identity. Restoring the criteria will return the user to their **previous state**.

If the Remove Action is set to **Delete**, the same action will **deprovision the user**.

9. Select **Save** once complete. Select the newly created Connection and enable the Connection using the toggle.


Bitwarden

Created on 2024-10-09

Overview

Configuration




Name

Bitwarden

Description


Bitwarden SCIM connection



Enable Ping Identity Connection

## Create a Rule

Before syncing user groups and directories, a Rule is required to sync the user groups to Bitwarden SCIM.

1. Return to the Provisioning Screen.
2. Select the **Rules** tab and then  **New Rule**.
3. Enter an app specific name for the Rule and select **Create Rule**.
4. Edit the new Rule in the Configuration tab. Select **Bitwarden SCIM connection** and then **Save**.

Overview **Configuration**

Select Source or Target to choose an available connection.



### Available Connections

[+ New Connection](#)



**Bitwarden**  
 Bitwarden SCIM connection



Ping Identity Rule



5. Select the Configuration tab and add a  **User Filter**. For more information, see the [Ping Identity documentation](#). Select **Save** once complete.

Bitwarden Rule > Edit User Filter

**User Filter**

Edit the user filter to change how users are selected for provisioning.

All
**Any**
of the conditions are true
 Add +

Attribute <b>Email Address</b>	Operator <b>Equals</b>	Value <b>@my-company.com</b>	
Attribute <b>Country Code</b>	Operator <b>Equals</b>	Value <b>US</b>	

Ping Identity User Filter

6. Enable the Rule using the toggle.

Bitwarden Rule

Created on 2024-10-09

Overview Configuration

Bitwarden Rule



Ping Identity new Rule

Provision groups

1. To assign groups, return to the Provisioning screen and select the rule : **Edit Group Provisioning**.

Bitwarden Rule > Edit Group Provisioning

Select groups for outbound provisioning. Group memberships in the target are updated according to user filter criteria.

For groups with matching names on the target, group memberships (the list of users in a group) will be overwritten with PingOne members during sync. [Learn More](#)

Search Group Name

Population

All Groups

Selected Groups 1

Bitwarden

Default

Edit group provisioning

2. Choose the group or groups to provision and select **Save**. Once saved, the directory will trigger a sync.

Appendix

Required attributes

Both the Bitwarden and Ping Identity **SCIM Provisioner with SAML (SCIM v2 Enterprise)** applications use standard SCIM v2 attribute names. Bitwarden will use the following attributes:



## User attributes

- `active`
- `emails`<sup>a</sup> or `userName`
- `displayName`
- `externalId`

<sup>a</sup> – Because SCIM allows users to have multiple email addresses expressed as an array of objects, Bitwarden will use the **value** of the object which contains "**primary**": **true**.

## Group attributes

For each group, Bitwarden will use the following attributes:

- `displayName` (**required**)
- `members`<sup>a</sup>
- `externalId`

<sup>a</sup> – **members** is an array of objects, each object representing a user in that group.